Trust stem from quality



**XSINCE 2009** 

贵州威隆机械设备有限公司



## INTRODUCTION

Guizhou Vilong Equipment Co,.Ltd is specialized in design, production and sales of all kinds of diamond coring, DTH and rotary drilling equipments from 2009; by cooperating with several leading manufacturers of this field in China, we are one of CN's leading supplier and exporter of rock drilling tools for open-pit mines, geological exploration, water well and blast hole drilling application.

All VILONG products implement ISO9001 standards, with more than 10 years of R&D experience on rock drilling tools, we are dedicated to providing you the most reliable and cost effective products with best services to resolve your construction challenges. Whatever rock drilling related equipments you need, we would always do our best to provide you "one stop shop" services to meet all your drilling requirements.

- > 10 Years of R&D experience
- > 46 Countries and regions the goods are used
- > 260 Clients all over the world
- ► 60,000 Combined square meters workshop



- DRILL RIGS
- DTH DRILLING TOOLS
- ROTARY DRILLING TOOLS
- DIAMOND CORE DRILLING TOOLS

♦ DTH DRILLING TOOLS	
Items & Description	Products range & Sizes
OV-DPH harmone: &	Sizes: 3 inches to 14 inches Shanks: DHD, QL, Mission, SD, Numa
DIA Hammer	
	Sizes: 3 inches to 20 inches Shanks: DHD, QL, Mission, SD, Numa
DTH Bit	
DTH Eccentric casing drilling system	ODEX system or TUBEX system, for casing 114mm to 325mm
DTH Concentric casing drilling system	Symmetrix system or Centrex system, for casing 114mm to 508mm
DTH hole opener	Reamed diameters: Max 508mm Shanks: DHD, QL, Mission, SD, Numa



Diameters: 76mm to 140mm Lengths: 1000-6000mm

Wall thickness: 6mm, 8mm, 10mm, 12mm, etc

Threads: 2 3/8", 2 7/8", 3 1/2", 4 1/2" API REG, IF etc

Production technology: Friction Welding

DTH drill rod



RC hammers: 3.5 inches to 4.5 inches

RC bits: 115mm to 160mm

RC rods:  $\phi$ 89mm,  $\phi$ 102mm,  $\phi$ 114mm

Threads: REMET, METZKE

Reverse circulation drilling tools

## ♦ DIAMOND CORE DRILLING TOOLS



Sizes: A, B, N, H, P, S, T2, T6, T6S, NMLC, HMLC, LTK48, LTK60

Diamond impregnated core bits



Sizes: A, B, N, H, P, S, T2, T6, T6S, NMLC, HMLC, LTK48, LTK60

Diamond crown profiles: Stepped, Semi round


Diamond surface set core bits



Sizes: A, B, N, H, P, S, T2, T6, T6S, NMLC, HMLC, LTK48, LTK60


TSP core bits



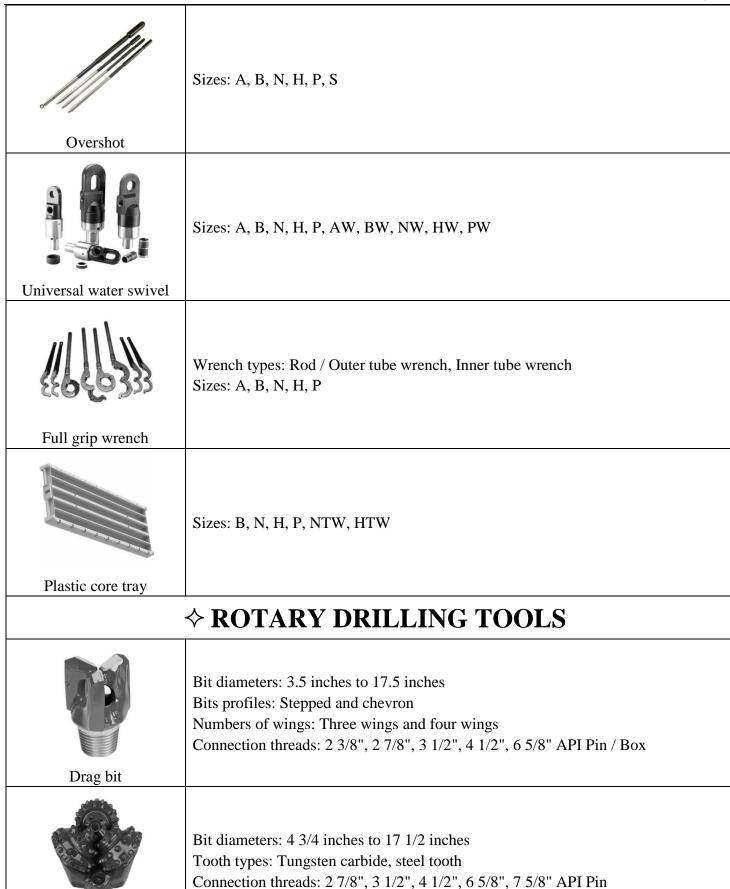

Tricone rock bit

## Trust stem from quality



Bit diameters: 6 inches to 17 1/2 inches

Number of Blades: Three, Four, Five, Six, Seven, Eight Connection threads: 2 7/8", 3 1/2", 4 1/2", 6 5/8" API Pin

O.D of pipe body: 50 to 127mm

Length: 1000 to 9500mm

Connection threads: 2 7/8", 3 1/2", 4 1/2", 6 5/8" API

Water well drill pipe

## **DRILL RIGS**



Model: GVW-730

DTH drill rigs



Model: GVW-800

Water well drill rigs